
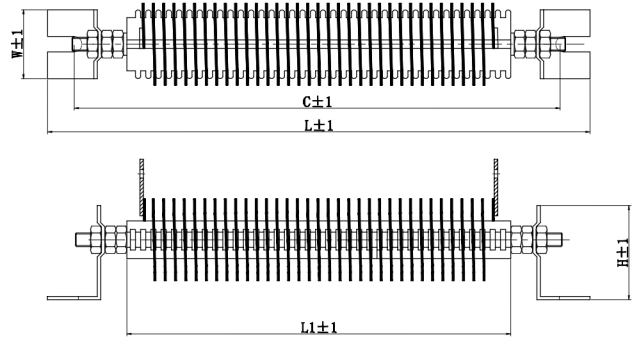


## REWR-G 板式大电流低阻值电阻器 500W-1800W

Round Slab Type Large Current Low Resistors Wire Wound Resistors 500W-1800W

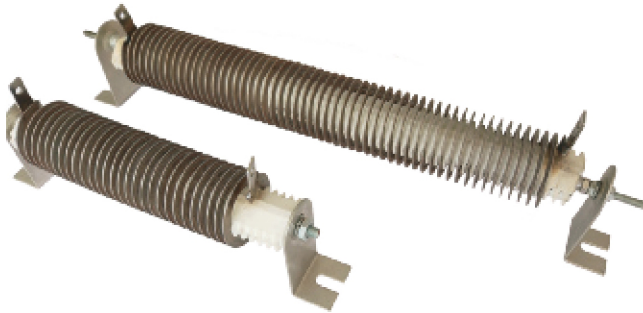

### 产品特点 Features

- 高温负荷特性  
Excellent high temperature load performance
- 耐潮湿、耐腐蚀，可在恶劣环境中使用  
Moisture resistance
- 高过载能力  
High over loading ability
- T系列为可调  
T series is adjustable

### 应用范围 Applications

- 电力分配，负荷测试  
Electric power distribution, load test
- 适用于功率电源  
Applied for functional power supply
- 变频电源等领域  
Variable frequency power source etc
- 用于工控的伺服系统中软启动和制动部分  
Applied to the soft starting and breaking parts of industrial controlled servo drive system

### 主要性能技术指标 Main specification

型号 Type	功率 Power (W)	阻值范围 Resistance Range	阻值精度 Tolerances Range	外形尺寸 Dimensions (mm)		
				L	L1	C
REWR-G	500	0.05-1R	±5% (J) ±10% (K)	190	120	160
	800	0.05-2R		280	200	250
	1000	0.05-3R		330	250	300
	1500	0.05-4R		480	400	450
	1800	0.05-5R		580	500	550

### 订货示例 How to order

产品型号 Type	功率 Power	标称阻值 Nominal value	精度 Tolerance
REWR-G	1000W	0.5R	±5%